



Service 3 unit G1/2 0,5-10 5µm with PC bowl and semi automatic drain

Standard Serie

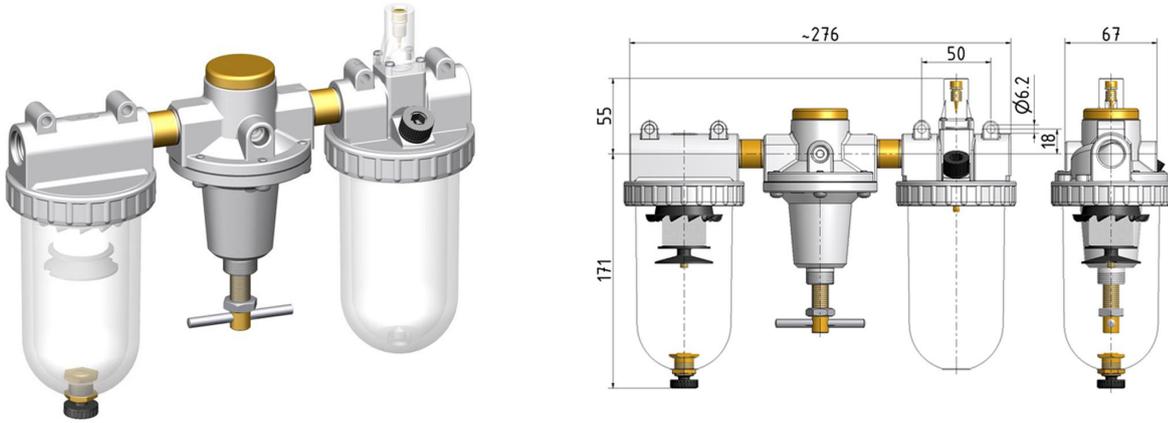


Article type	Article number	Series	Control range P2 max.	Flow	Weight (kg)
FRO.33-10-5-PC-HA	031856	Standard	10 bar	3200 l/min	2,7812


Flow diagram

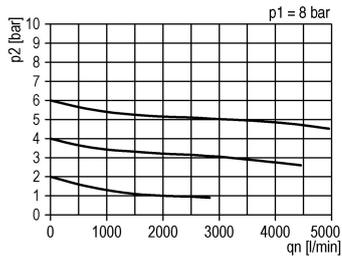


Hysteresis

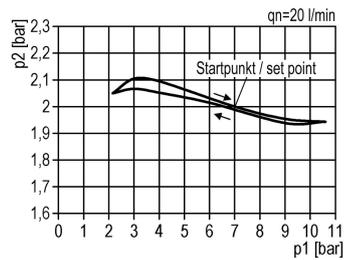

Oiler response limit

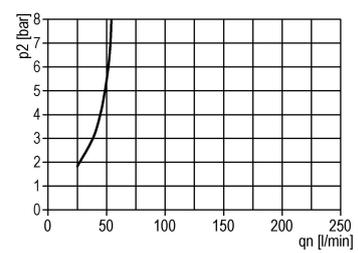

Symbol



Technical data

Connection:
G 1/2

Construction size:
BG3

Flow:
3200 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Control range P2 max.:
10 bar

Temperature area:
-10 °C - +60 °C

Container:
PC

Container volume oiler:
135 cm³

Filter fineness:
5 µm

Condensate drain:
Semi-automatic drain (HA)

Pressure gauge:
no

Oil dosing:
1 - 2 d/min

Oil type:
CL 32 according to DIN 51517 - ISO VG 32

Panel nut:
no

Accessories




000768

PC bowl with semi automatic drain and o-ring
67,95x2,62



005581

PC oil bowl with o-ring 67,95x2,62

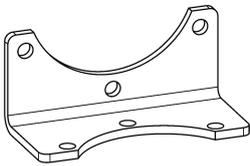

009487

Mounting bracket packed in a bag



Kein Bild vorhanden

051939

Spare-part set: panel mounting ring for
standard-series BGI, 2 and 3



Kein Bild vorhanden

052192

Mounting bracket (ZW.11+2x screw M4x50
DIN912)

052269

Gauge ø50 0-16 G1/4 Knocks instrument dial
light grey


Spare Parts

005990
repair-kit for regulator DR.33 , DR.34 and DR.35@@consists of: 1x diaphragm compl., 1x valve cone compl., 1x o-ring 31x3

052188
Spare-part set: filter element 5µm (Cellpor)


Service 3 unit G1 0,5-10 40µm with PC bowl, semi automatic drain and gauge G 63.16 R

Standard Serie

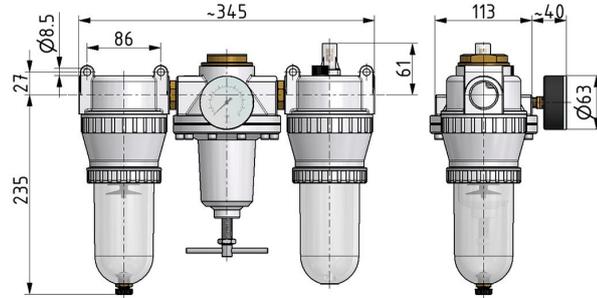


Article type	Article number	Series	Control range P2 max.	Flow	Weight (kg)
FRO.55-10-40-PC-HA-G	004271	Standard	10 bar	5000 l/min	4,5249


Flow diagram

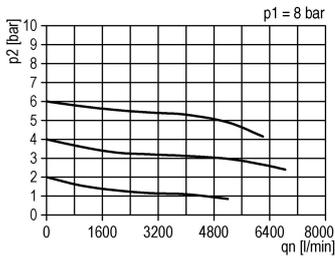


Hysteresis

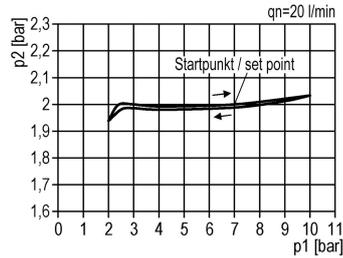

Oiler response limit

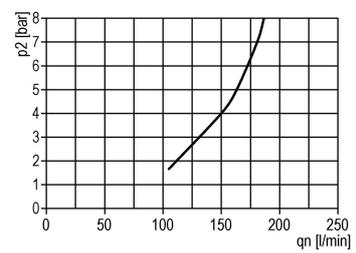

Symbol



Technical data

Connection:
G 1

Construction size:
BG5

Flow:
5000 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Control range P2 max.:
10 bar

Temperature area:
-10 °C - +60 °C

Container:
PC

Container volume oiler:
550 cm³

Filter fineness:
40 µm

Condensate drain:
Semi-automatic drain (HA)

Pressure gauge:
yes

Oil dosing:
1 - 2 d/min

Oil type:
CL 32 according to DIN 51517 - ISO VG 32

Panel nut:
no

Accessories




000768

PC bowl with semi automatic drain and o-ring
67,95x2,62



005581

PC oil bowl with o-ring 67,95x2,62



050549

Mounting bracket packed in a bag



Kein Bild vorhanden

052269


Gauge ø50 0-16 Cl/4 Knocks instrument dial
light grey

Spare Parts


006048
repair-kit for regulator DR.55 consists of: 1x diaphragm compl., 1x valve cone compl., 1x o-ring 50x4

008866
spare-part set: filter element 40µm


dimensions (mm)

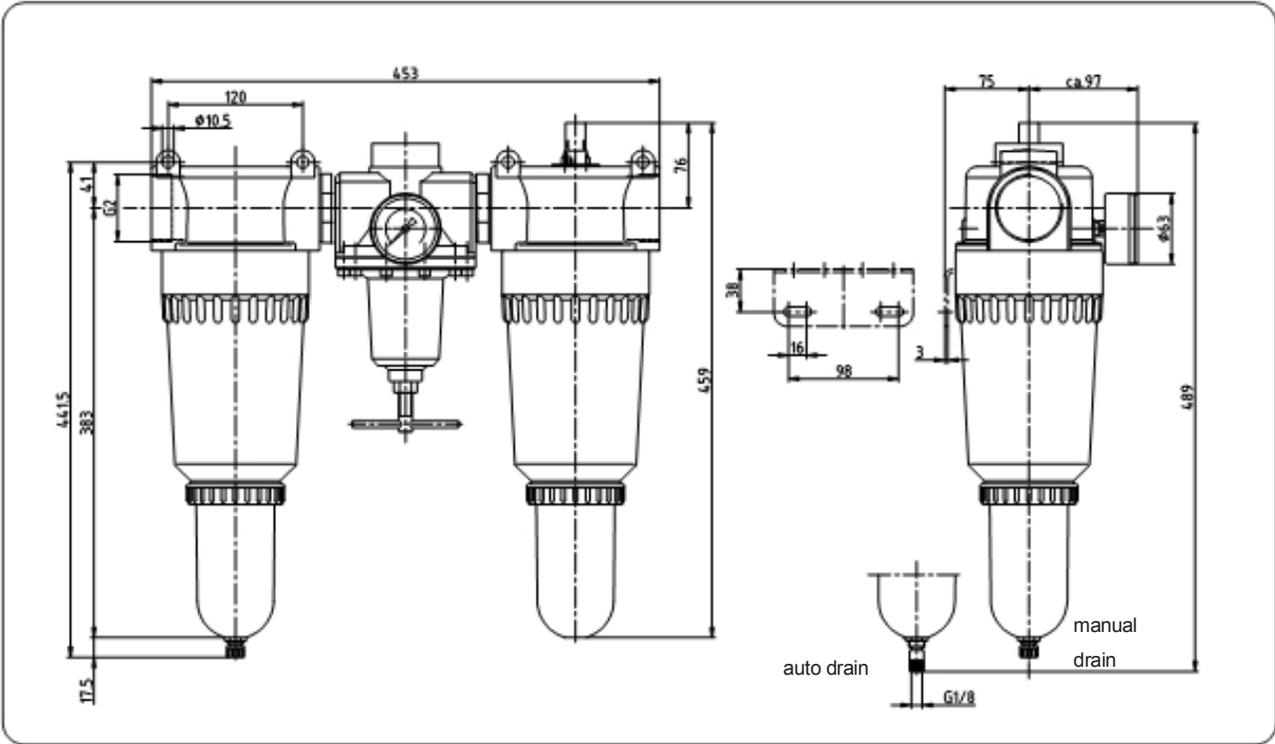


flow characteristics

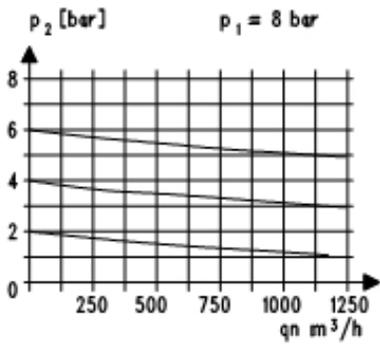

pressure characteristic

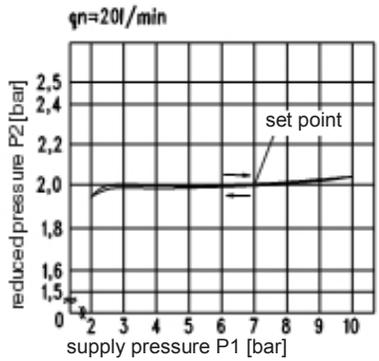

lubricator operating limit

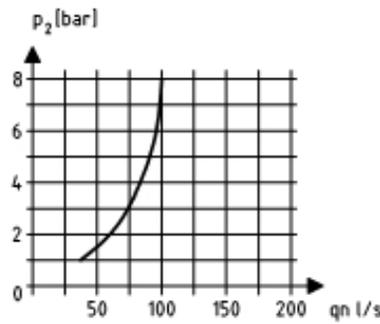

accessories

<p>gauge</p> <p>type: G 63. 3/ 6 R G 63. 6/10 R G 63.10/16 R G 63.16/25 R</p>	<p>bowl guard</p> <p>type: DF.33-11</p>
<p>filter-element</p> <p>type: 8μm: DF.88-8</p>	<p>metal bowl</p> <p>type: DO.33 M</p>
<p>mounting bracket</p> <p>type: BW.50</p>	<p>spring</p> <p>type: 0,1- 3: DR.55-29 0,5- 6: DR.55-30 0,5-16: DR.55-28</p>
	<p>auto drain</p> <p>type: AM.5</p>