


Male Stud Coupling

with tapered BSP thread to DIN 3858

geR

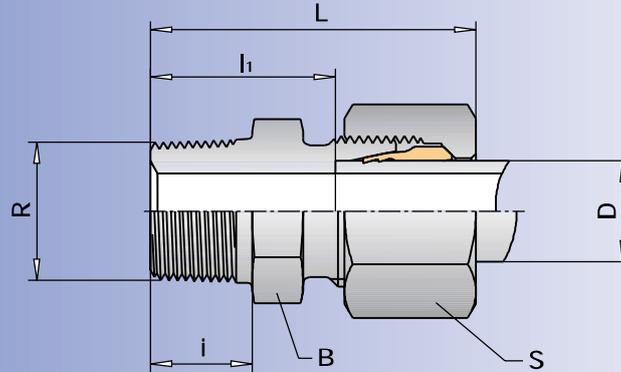

sf
510

PN	D	R	i	S	B	L	l ₁	sf-No.	
	4	R	1/8" keg.	8	10	10	25,5	16,0	510 4 LL R 18
LL 100	6	R	1/8" keg.	8	12	11	26,0	14,5	510 6 LL R 18
	8	R	1/8" keg.	8	14	12	28,0	16,5	510 8 LL R 18
	6	R	1/8" keg.	8	14	12	30,5	16,0	510 6 L R 18
L 315	6	R	1/4" keg.	12	14	14	34,5	20,0	510 6 L R 14
	8	R	1/4" keg.	12	17	14	35,0	20,0	510 8 L R 14
	10	R	1/4" keg.	12	19	17	36,0	21,0	510 10 L R 14
	10	R	3/8" keg.	12	19	17	36,0	21,0	510 10 L R 38
	12	R	3/8" keg.	12	22	19	37,0	22,0	510 12 L R 38
	12	R	1/2" keg.	14	22	22	39,0	24,0	510 12 L R 12
	15	R	1/2" keg.	14	27	24	40,0	25,0	510 15 L R 12
	18	R	1/2" keg.	14	32	27	42,0	25,5	510 18 L R 12
	22	R	3/4" keg.	16	36	32	46,0	29,5	510 22 L R 34
160	28	R	1" keg.	18	41	41	49,0	32,5	510 28 L R 1
	35	R	1 1/4" keg.	20	50	46	56,0	34,5	510 35 L R 114
	42	R	1 1/2" keg.	22	60	55	61,0	38,0	510 42 L R 112

■ Material: AISI 316Ti

Operational safety on male stud connection is 2.5 times the stated pressure,
on the pipe connection - 4 times.
Further information on request.