

# Male Stud Coupling



with parallel BSP thread to ISO 228

geG

**SF**  
510



Metal Sealing Edge

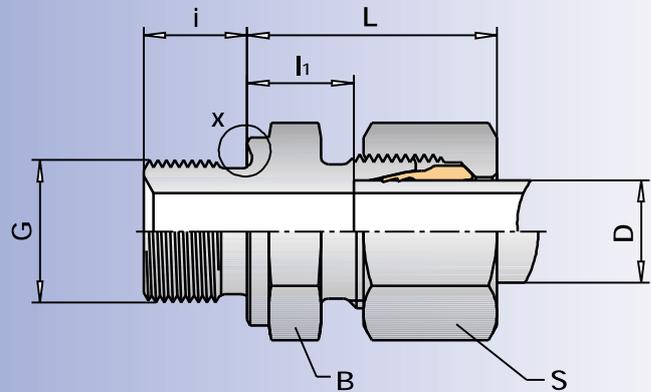

PN	D	G	i	S	B	L	l <sub>1</sub>	SF-No.
<b>S</b> 630	6	G 1/8"	8	17	17	26,0	11,0	510 6 S 18
	6	G 1/4"	12	17	<b>19</b>	<b>28,0</b>	<b>13,0</b>	510 6 S 14
	6	G 3/8"	12	17	22	30,0	15,0	510 6 S 38
	6	G 1/2"	14	17	27	33,0	18,0	510 6 S 12
	6	G 3/4"	16	17	32	35,0	20,0	510 6 S 34
	8	G 1/4"	12	19	<b>19</b>	<b>30,0</b>	<b>15,0</b>	510 8 S 14
	8	G 3/8"	12	19	22	30,5	15,5	510 8 S 38
	8	G 1/2"	14	19	27	33,0	18,0	510 8 S 12
	10	G 1/4"	12	22	22	30,5	14,5	510 10 S 14
	10	G 3/8"	12	<b>22</b>	<b>22</b>	<b>31,0</b>	<b>15,0</b>	510 10 S 38
	10	G 1/2"	14	22	27	33,5	17,5	510 10 S 12
	12	G 1/4"	12	24	22	33,0	17,0	510 12 S 14
	12	G 3/8"	12	<b>24</b>	<b>22</b>	<b>33,0</b>	<b>17,0</b>	510 12 S 38
	12	G 1/2"	14	24	27	33,5	17,5	510 12 S 12
14	G 1/4"	12	27	24	34,0	16,0	510 14 S 14	
14	G 3/8"	12	27	24	37,0	19,0	510 14 S 38	
14	G 1/2"	14	27	<b>27</b>	<b>37,0</b>	<b>19,0</b>	510 14 S 12	
14	G 3/4"	16	27	32	39,0	19,0	510 14 S 34	
14	G 1"	18	27	41	41,0	23,0	510 14 S 1	
400	16	G 3/8"	12	30	27	35,0	16,5	510 16 S 38
	16	G 1/2"	14	30	<b>27</b>	<b>37,0</b>	<b>18,5</b>	510 16 S 12
	16	G 3/4"	16	30	32	39,0	20,5	510 16 S 34
	20	G 1/2"	14	36	32	42,0	20,5	510 20 S 12
	20	G 3/4"	16	<b>36</b>	<b>32</b>	<b>42,0</b>	<b>20,5</b>	510 20 S 34
	20	G 1"	18	36	41	44,0	22,5	510 20 S 1
	20	G 1 1/4"	20	36	50	44,0	22,5	510 20 S 114
	20	G 1 1/2"	22	36	55	47,0	25,5	510 20 S 112
	25	G 3/4"	16	46	41	45,0	21,0	510 25 S 34
	25	G 1"	18	46	<b>41</b>	<b>47,0</b>	<b>23,0</b>	510 25 S 1
	25	G 1 1/4"	20	46	50	47,0	23,0	510 25 S 114
25	G 1 1/2"	22	46	55	50,0	26,0	510 25 S 112	
30	G 1"	18	50	46	50,0	23,5	510 30 S 1	
30	G 1 1/4"	20	50	<b>50</b>	<b>50,0</b>	<b>23,5</b>	510 30 S 114	
30	G 1 1/2"	22	50	55	53,0	26,5	510 30 S 112	
38	G 1 1/4"	20	60	55	54,0	23,0	510 38 S 114	
315	38	G 1 1/2"	22	60	55	57,0	26,0	510 38 S 112

■ Material: AISI 316Ti

Operational safety on male stud connection is 2.5 times the stated pressure, on the pipe connection - 4 times. **Bold type = Row to DIN 3901**