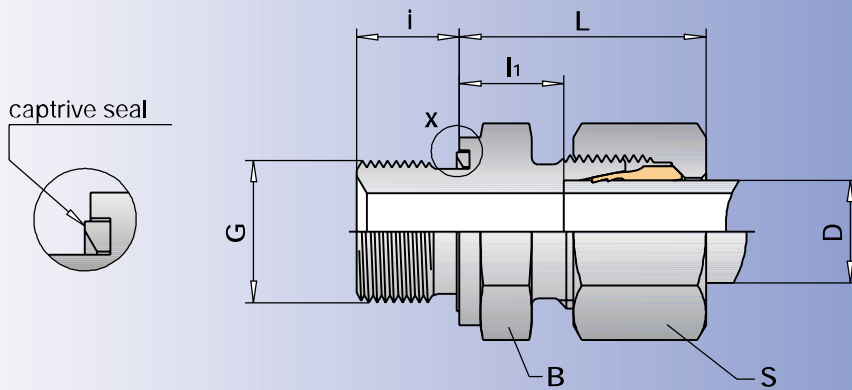



sf
512

PN	D	G	i	S	B	L	l ₁	<i>sf</i> -No.	
L 315	6	G 1/8"	8	14	14	23,0	8,5	512 6 L 18	
	6	G 1/4"	12	14	19	24,5	10,0	512 6 L 14	
	6	G 3/8"	12	14	22	26,0	11,5	512 6 L 38	
	6	G 1/2"	14	14	27	26,5	12,0	512 6 L 12	
	8	G 1/8"	8	17	17	23,5	8,5	512 8 L 18	
	8	G 1/4"	12	17	19	25,0	10,0	512 8 L 14	
	8	G 3/8"	12	17	22	26,0	11,5	512 8 L 38	
	8	G 1/2"	14	17	27	26,5	12,0	512 8 L 12	
	10	G 1/8"	8	19	17	25,5	10,5	512 10 L 18	
	10	G 1/4"	12	19	19	26,0	11,0	512 10 L 14	
	10	G 3/8"	12	19	22	27,5	12,5	512 10 L 38	
	10	G 1/2"	14	19	27	29,0	14,0	512 10 L 12	
	12	G 1/8"	8	22	19	25,5	10,5	512 12 L 18	
	12	G 1/4"	12	22	19	26,0	12,0	512 12 L 14	
	12	G 3/8"	12	22	22	27,5	12,5	512 12 L 38	
	12	G 1/2"	14	22	27	28,0	13,0	512 12 L 12	
	15	G 3/8"	12	27	24	28,5	13,5	512 15 L 38	
	15	G 1/2"	14	27	27	29,0	14,0	512 15 L 12	
	15	G 3/4"	16	27	32	30,0	15,0	512 15 L 34	
	18	G 3/8"	12	32	27	31,0	14,5	512 18 L 38	
18	G 1/2"	14	32	27	31,0	14,5	512 18 L 12		
18	G 3/4"	16	32	32	31,0	14,5	512 18 L 34		
160	22	G 1/2"	14	36	32	33,0	16,5	512 22 L 12	
	22	G 3/4"	16	36	32	33,0	16,5	512 22 L 34	
	22	G 1"	18	36	41	34,0	17,5	512 22 L 1	
	28	G 1/2"	14	41	41	33,0	16,5	512 28 L 12	
	28	G 3/4"	16	41	41	33,0	16,5	512 28 L 34	
	28	G 1"	18	41	41	34,0	17,5	512 28 L 1	
	28	G 1 1/4"	20	41	50	35,0	18,5	512 28 L 114	
	35	G 1/2"	14	50	46	37,0	15,5	512 35 L 12	
	35	G 3/4"	16	50	46	38,0	16,5	512 35 L 34	
	35	G 1"	18	50	46	38,0	16,5	512 35 L 1	
	35	G 1 1/4"	20	50	50	39,0	17,5	512 35 L 114	
	35	G 1 1/2"	22	50	55	41,0	19,5	512 35 L 112	
	42	G 1"	18	60	55	39,0	16,0	512 42 L 1	
	42	G 1 1/4"	20	60	55	40,0	17,0	512 42 L 114	
42	G 1 1/2"	22	60	55	42,0	19,0	512 42 L 112		

■ Material: AISI 316Ti

Captive seal in Perbunan (NBR), Viton on request

Operational safety on male stud connection is 2.5 times the stated pressure,
on the pipe connection - 4 times. **Bold type = Row to DIN 3901**