


Male Stud Coupling

geG

with parallel BSP thread to ISO 228
with captive seal in NBR

SF
512

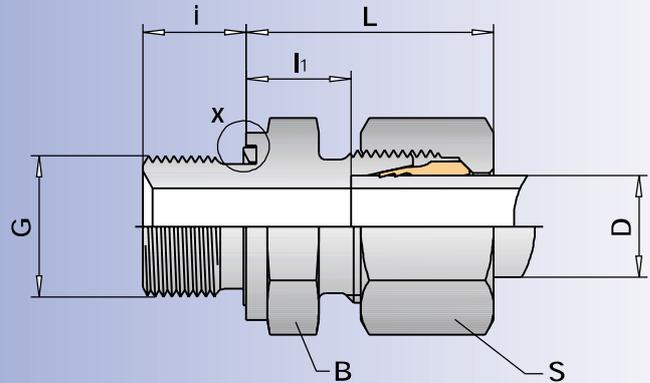

	PN	D	G	i	S	B	L	l ₁	SF-No.
S	630	6	G 1/8"	8	17	17	26,0	11,0	512 6 S 18
		6	G 1/4"	12	17	19	28,0	13,0	512 6 S 14
		6	G 3/8"	12	17	22	30,0	15,0	512 6 S 38
		6	G 1/2"	14	17	27	33,0	18,0	512 6 S 12
		6	G 3/4"	16	17	32	35,0	20,0	512 6 S 34
		8	G 1/4"	12	19	19	30,0	15,0	512 8 S 14
	8	G 3/8"	12	19	22	30,5	15,5	512 8 S 38	
	8	G 1/2"	14	19	27	33,0	18,0	512 8 S 12	
	10	G 1/4"	12	22	22	30,5	14,5	512 10 S 14	
	10	G 3/8"	12	22	22	31,0	15,0	512 10 S 38	
	10	G 1/2"	14	22	27	33,5	17,5	512 10 S 12	
	12	G 1/4"	12	24	22	33,0	17,0	512 12 S 14	
	12	G 3/8"	12	24	22	33,0	17,0	512 12 S 38	
	12	G 1/2"	14	24	27	33,5	17,5	512 12 S 12	
	14	G 1/4"	12	27	24	34,0	16,0	512 14 S 14	
	14	G 3/8"	12	27	24	37,0	19,0	512 14 S 38	
	14	G 1/2"	14	27	27	37,0	19,0	512 14 S 12	
	14	G 3/4"	16	27	32	39,0	19,0	512 14 S 34	
14	G 1"	18	27	41	41,0	23,0	512 14 S 1		
16	G 3/8"	12	30	27	35,0	16,5	512 16 S 38		
400	16	G 1/2"	14	30	27	37,0	18,5	512 16 S 12	
	16	G 3/4"	16	30	32	39,0	20,5	512 16 S 34	
	20	G 1/2"	14	36	32	42,0	20,5	512 20 S 12	
	20	G 3/4"	16	36	32	42,0	20,5	512 20 S 34	
	20	G 1"	18	36	41	44,0	22,5	512 20 S 1	
	20	G 1 1/4"	20	36	46	44,0	22,5	512 20 S 114	
	20	G 1 1/2"	22	36	55	47,0	25,5	512 20 S 112	
	25	G 3/4"	16	46	41	45,0	21,0	512 25 S 34	
	25	G 1"	18	46	41	47,0	23,0	512 25 S 1	
	25	G 1 1/4"	20	46	50	47,0	23,0	512 25 S 114	
	25	G 1 1/2"	22	46	55	50,0	26,0	512 25 S 112	
	30	G 1"	18	50	46	50,0	23,5	512 30 S 1	
30	G 1 1/4"	20	50	50	50,0	23,5	512 30 S 114		
30	G 1 1/2"	22	50	55	53,0	26,5	512 30 S 112		
315	38	G 1 1/4"	20	60	55	54,0	23,0	512 38 S 114	
	38	G 1 1/2"	22	60	55	57,0	26,0	512 38 S 112	
	50	G 1 3/4"	24	80	70	72,0		512 50 S 134	
250	50	G 2"	24	80	70	72,0		512 50 S 2	

■ Material: AISI 316Ti

Captive seal in Perbunan (NBR), Viton on request

Operational safety on male stud connection is 2.5 times the stated pressure,
on the pipe connection - 4 times. **Bold type = Row to DIN 3901**