


Male Stud Elbow

with tapered BSP thread to DIN 3858

weR

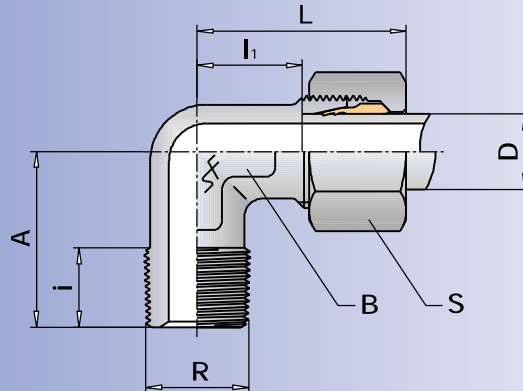

sf
516

	PN	D	R	i	S	B	A	L	I ₁	sf-No.
LL 100		4	R 1/8 keg.	8	10	9	17	21,0	11,0	516 4 LLR 18
		6	R 1/8 keg.	8	12	9	17	21,0	9,5	516 6 LLR 18
		8	R 1/8 keg.	8	14	12	20	23,0	11,5	516 8 LLR 18
L 316		6	R 1/8 keg.	8	14	12	20	26,5	12,0	516 6 LR 18
		6	R 1/4 keg.	12	14	12	24	26,5	12,0	516 6 LR 14
		8	R 1/8 keg.	8	17	12	24	28,5	14,0	516 8 LR 18
		8	R 1/4 keg.	12	17	12	26	28,5	14,0	516 8 LR 14
		8	R 3/8 keg.	12	17	14	27	29,5	15,0	516 8 LR 38
		8	R 1/2 keg.	14	17	19	30	31,5	17,0	516 8 LR 12
		10	R 1/4 keg.	12	19	14	27	29,5	15,0	516 10 LR 14
		10	R 3/8 keg.	12	19	14	28	29,5	15,0	516 10 LR 38
		10	R 1/2 keg.	14	19	19	31	29,5	15,0	516 10 LR 12
		12	R 1/4 keg.	12	22	17	28	32,0	17,0	516 12 LR 14
		12	R 3/8 keg.	12	22	17	28	32,0	17,0	516 12 LR 38
		12	R 1/2 keg.	14	22	19	32	36,0	21,0	516 12 LR 12
		15	R 1/2 keg.	14	27	19	34	36,0	21,0	516 15 LR 12
		18	R 1/2 keg.	14	32	24	36	40,0	23,5	516 18 LR 12
S 630 ¹⁾		6	R 1/4 keg.	12	17	12	26	31,0	16,0	516 6 SR 14
		6	R 3/8 keg.	12	17	14	26	31,0	16,0	516 6 SR 38
		6	R 1/2 keg.	14	17	17	32	31,0	16,0	516 6 SR 12
		8	R 1/4 keg.	12	19	14	27	32,0	17,0	516 8 SR 14
		8	R 3/8 keg.	12	19	14	27	32,0	17,0	516 8 SR 38
		8	R 1/2 keg.	14	19	17	30	32,0	17,0	516 8 SR 12
		10	R 1/4 keg.	12	22	17	28	34,0	17,5	516 10 SR 14
		10	R 3/8 keg.	12	22	17	28	34,0	17,5	516 10 SR 38
		10	R 1/2 keg.	14	22	19	31	34,0	17,5	516 10 SR 12
		12	R 3/8 keg.	12	24	17	28	38,0	21,5	516 12 SR 38
		12	R 1/2 keg.	14	24	19	32	38,0	21,5	516 12 SR 12
		14	R 3/8 keg.	12	27	19	31	40,0	22,0	516 14 SR 38
		14	R 1/2 keg.	14	27	19	32	40,0	22,0	516 14 SR 12
400		16	R 1/2 keg.	14	30	24	32	43,0	24,5	516 16 SR 12

■ Material: AISI 316Ti

¹⁾ PN 630 only for tapered tapped holes, otherwise PN 400

Operational safety on male stud connection is 2.5 times the stated pressure,
on the pipe connection - 4 times.