


Male Stud Coupling

with NPT male thread to ANSI/ASME B 1.20.1-1983

weN

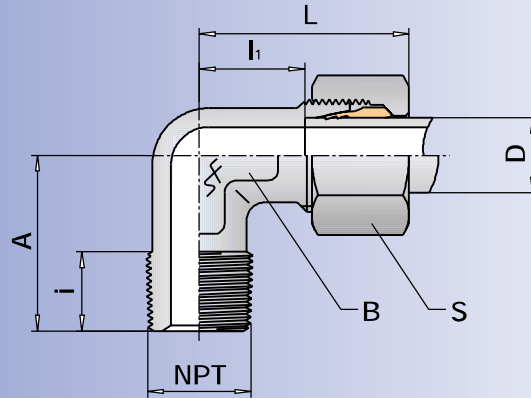

sf
518

	PN	D	NPT	i	S	B	A	L	I ₁	sf-No.	
L	315	6	1/8"	9,9	14	12	20	27	12,0	518 6 L 18	
		6	1/4"	15,1	14	12	26	27	12,0	518 6 L 14	
		6	3/8"	15,2	14	14	28	27	12,0	518 6 L 38	
		8	1/8"	9,9	17	12	24	29	14,0	518 8 L 18	
		8	1/4"	15,1	17	12	26	29	14,0	518 8 L 14	
		10	1/4"	15,1	19	14	27	30	15,0	518 10 L 14	
	160	10	3/8"	15,2	19	14	28	32	17,0	518 10 L 38	
		12	1/4"	15,1	22	17	28	32	17,0	518 12 L 14	
		12	3/8"	15,2	22	17	28	32	17,0	518 12 L 38	
		12	1/2"	19,8	22	19	34	32	17,0	518 12 L 12	
		15	1/2"	19,8	27	19	34	36	21,0	518 15 L 12	
		18	1/2"	19,8	32	24	36	40	23,5	518 18 L 12	
S	630	22	3/4"	20,1	36	27	42	44	27,5	518 22 L 34	
		28	1"	25,0	41	36	48	47	30,5	518 28 L 1	
		35	1 1/4"	25,6	50	41	54	56	34,5	518 35 L 114	
		42	1 1/2"	26,0	60	50	61	63	40,0	518 42 L 112	
		6	1/4"	15,1	17	12	26	31	16,0	518 6 S 14	
		6	3/8"	15,2	17	14	28	31	16,0	518 6 S 38	
	400	6	1/2"	19,8	17	19	33	31	16,0	518 6 S 12	
		8	1/4"	15,1	19	14	27	32	17,0	518 8 S 14	
		8	3/8"	15,2	19	14	28	32	17,0	518 8 S 38	
		8	1/2"	19,8	19	19	33	32	17,0	518 8 S 12	
		10	1/4"	15,1	22	17	28	34	17,5	518 10 S 14	
		10	3/8"	15,2	22	17	28	34	17,5	518 10 S 38	
	315	12	1/4"	15,1	24	17	28	38	21,5	518 12 S 14	
		12	3/8"	15,2	24	17	29	38	21,5	518 12 S 38	
		12	1/2"	19,8	24	19	34	38	21,5	518 12 S 12	
		14	3/8"	15,2	27	19	34	40	22,0	518 14 S 38	
		14	1/2"	19,8	27	19	35	40	22,0	518 14 S 12	
		16	1/2"	19,8	30	24	36	43	24,5	518 16 S 12	
	315	20	3/4"	20,1	36	27	42	48	26,5	518 20 S 34	
		25	1"	25,0	46	36	48	54	30,0	518 25 S 1	
		30	1 1/4"	25,6	50	41	54	62	35,5	518 30 S 114	
		38	1 1/2"	26,0	60	50	61	72	41,0	518 38 S 112	

■ Material: AISI 316Ti