


Female Stud Coupling

with parallel inside BSP thread to ISO 228

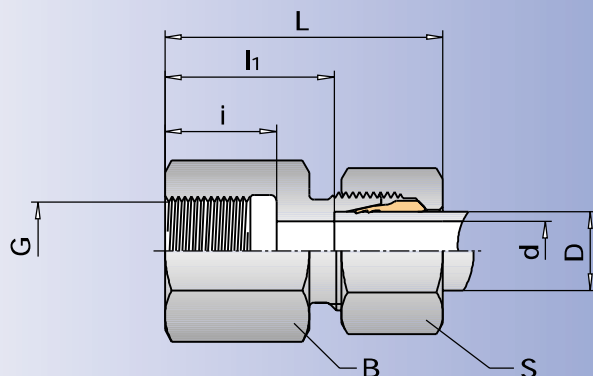

sf
530

	PN	D	G	i	S	B	d	L	h	sf-No
L	315	6	G 1/8"	12,0	14	14	4	34	19,0	530 6 L
		6	G 1/4"	17,0	14	19	4	39	24,0	530 6 L 14
		8	G 1/4"	17,0	17	19	6	39	24,0	530 8 L
		10	G 1/4"	17,0	19	19	7	40	25,0	530 10 L
		12	G 3/8"	17,0	22	24	9	41	26,0	530 12 L
		12	G 1/2"	20,0	22	27	9	46	31,0	530 12 L 12
		15	G 3/8"	17,0	27	24	11	42	27,0	530 15 L 38
		15	G 1/2"	20,0	27	27	11	46	31,0	530 15 L
		18	G 3/8"	17,0	32	27	15	44	27,5	530 18 L 38
		18	G 1/2"	20,0	32	27	15	47	30,5	530 18 L
S	630	22	G 3/4"	22,0	36	36	18	52	35,5	530 22 L
		28	G 1"	24,5	41	41	23	55	38,0	530 28 L
		35	G 1 1/4"	26,5	50	55	30	63	41,0	530 35 L
		42	G 1 1/2"	28,5	60	60	36	65	42,5	530 42 L
		6	G 1/8"	12,0	17	17	4	36	21,0	530 6 S 18
		6	G 1/4"	17,0	17	19	4	41	26,0	530 6 S
		8	G 1/4"	17,0	19	19	5	41	26,0	530 8 S
		10	G 3/8"	17,0	22	24	7	43	26,5	530 10 S
		12	G 1/4"	17,0	24	22	8	43	25,5	530 12 S 14
		12	G 3/8"	17,0	24	24	8	43	26,5	530 12 S
S	400	12	G 1/2"	20,0	24	27	8	47	30,5	530 12 S 12
		14	G 1/2"	20,0	27	30	10	50	32,0	530 14 S
		16	G 1/2"	20,0	30	30	12	50	31,5	530 16 S
		20	G 3/8"	15,0	36	32	15	41	19,5	530 20 S 38
		20	G 1/2"	20,0	36	32	16	52	30,5	530 20 S 12
		20	G 3/4"	22,0	36	36	16	56	34,5	530 20 S
		25	G 1"	24,5	46	41	20	62	37,5	530 25 S
		30	G 1 1/4"	26,5	50	55	25	69	42,0	530 30 S
		315	G 1 1/2"	28,5	60	60	32	74	43,5	530 38 S

■ Material: AISI 316Ti