


rvD

Non Return Valve

pipe connections both ends

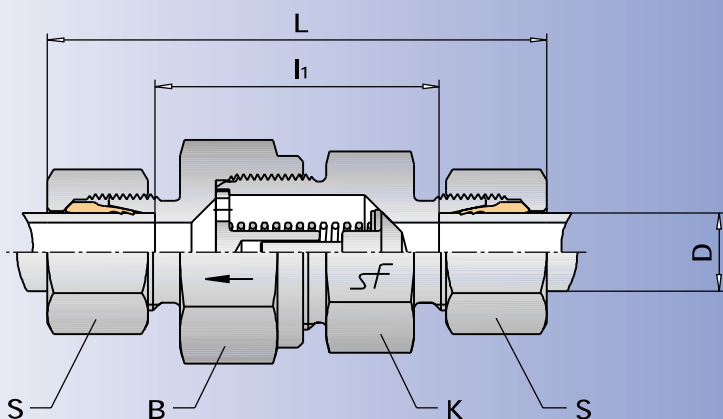

sf
550

	PN	D	S	B	K	L	l ₁	sf-No.
L	250	6	14	17	17	58,0	29,0	550 6 L
		8	17	19	19	59,0	30,0	550 8 L
		10	19	24	22	69,5	40,5	550 10 L
		12	22	30	27	72,5	43,5	550 12 L
		15	27	32	27	77,5	47,5	550 15 L
160	18	18	32	36	36	83,5	51,5	550 18 L
		22	36	46	41	93,5	61,5	550 22 L
		28	41	55	50	104,5	71,5	550 28 L
100	35	35	50	60	60	117,5	74,5	550 35 L
		42	60	70	65	128,0	83,0	550 42 L
S	400	6	17	19	19	63,5	34,5	550 6 S
		8	19	19	19	63,5	34,5	550 8 S
		10	22	24	22	72,5	40,5	550 10 S
		12	24	30	27	74,5	42,5	550 12 S
		14	27	32	27	82,5	47,5	550 14 S
		16	30	36	32	86,5	50,5	550 16 S
		20	36	46	41	97,5	54,5	550 20 S
		25	46	50	46	106,5	58,5	550 25 S
250	30	30	50	60	60	122,5	69,5	550 30 S
		38	60	70	65	136,5	75,5	550 38 S

■ Material: AISI 316Ti

Operational safety is 1,5 times the stated pressure. Standard opening pressure = 1 bar
Alternative opening pressures of 0,5, 2,0 and 3,0 bar available on request.

Seals in Viton (standard) Temp. -25° C +200° C

Perbunan (NBR) on request -30° C +100° C

Maximum through flow speed 8 m/s.