


with parallel BSP thread to ISO 228 both sides

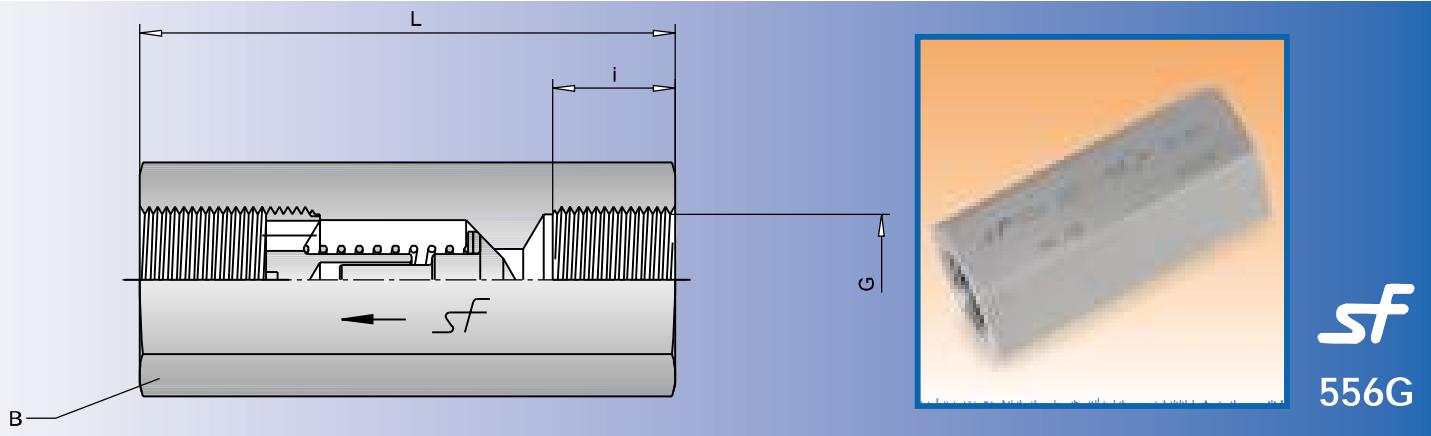

sf
556G

PN	DN	G	i	B	L	sf-No.	
	6	G 1/8"	8,5	17	44,0	556 G 18	
400	8	G 1/4"	12,5	19	52,0	556 G 14	
	10	G 3/8"	12,5	24	61,0	556 G 38	
	15	G 1/2"	15,0	32	73,0	556 G 12	
	20	G 3/4"	17,0	41	84,0	556 G 34	
	25	G 1"	19,0	46	95,0	556 G 1	
250	32	G 1 1/4"	21,0	55	105,0	556 G 114	
	40	G 1 1/2"	22,5	60	110,0	556 G 112	

■ Material: AISI 316Ti

Operational safety is 1,5 times the stated pressure. Standard opening pressure = 1 bar
Alternative opening pressures of 0,5, 2,0 and 3,0 bar available on request.

Seals in Viton (standard) Temp. -25° C +200° C

Perbunan (NBR) on request -30° C +100° C

Maximum through flow speed 8 m/s.