


evG

Adjustable Male Stud Standpipe

with parallel BSP thread to ISO 228
pre installed

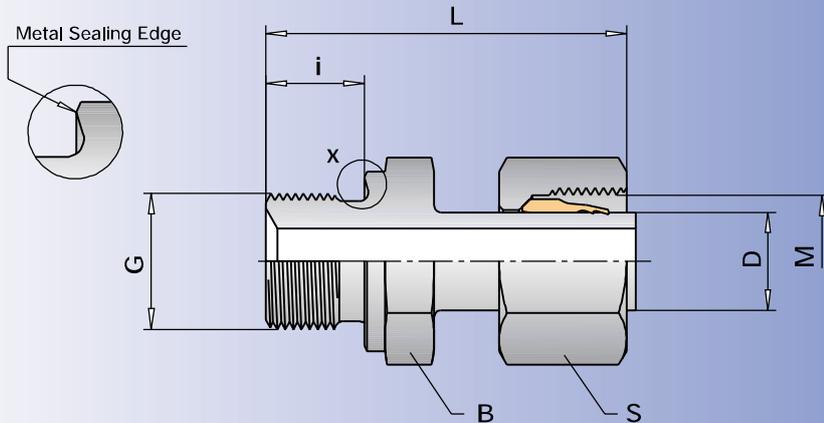

sf
573

	PN	D	G	i	M	S	B	L	sf-No.
L	250	6	G 1/8"	8	M 12 x 1,5	14	14	32,5	573 6 L
		8	G 1/4"	12	M 14 x 1,5	17	19	41,5	573 8 L
		10	G 1/4"	12	M 16 x 1,5	19	19	39,5	573 10 L
		12	G 1/4"	12	M 18 x 1,5	22	19	39,5	573 12 L 14
		12	G 3/8"	12	M 18 x 1,5	22	22	46,0	573 12 L
		15	G 1/2"	14	M 22 x 1,5	27	27	46,0	573 15 L
160		18	G 1/2"	14	M 26 x 1,5	32	27	45,5	573 18 L
		22	G 3/4"	16	M 30 x 2,0	36	32	48,5	573 22 L
		28	G 1"	18	M 36 x 2,0	41	41	53,0	573 28 L
100		35	G 1 1/4"	20	M 45 x 2,0	50	50	62,5	573 35 L
		42	G 1 1/2"	22	M 52 x 2,0	60	55	68,5	573 42 L
S	630	6	G 1/4"	12	M 14 x 1,5	17	19	39,0	573 6 S
		8	G 1/4"	12	M 16 x 1,5	19	19	41,5	573 8 S
		10	G 3/8"	12	M 18 x 1,5	22	22	44,0	573 10 S
		12	G 3/8"	12	M 20 x 1,5	24	22	46,0	573 12 S
		12	G 1/2"	14	M 20 x 1,5	24	27	48,5	573 12 S 12
		14	G 1/2"	14	M 22 x 1,5	27	27	50,5	573 14 S
		16	G 1/2"	14	M 24 x 1,5	30	27	51,0	573 16 S
		400	16	G 3/4"	16	M 24 x 1,5	30	32	55,0
400		20	G 3/4"	16	M 30 x 2,0	36	32	59,0	573 20 S
		25	G 1"	18	M 36 x 2,0	46	41	66,0	573 25 S
		30	G 1"	18	M 42 x 2,0	50	41	68,0	573 30 S 1
		30	G 1 1/4"	20	M 42 x 2,0	50	50	71,0	573 30 S
		38	G 1 1/2"	22	M 52 x 2,0	60	55	82,0	573 38 S

■ Material: AISI 316Ti

Operational safety on male stud connection is 2.5 times the stated pressure,
on the pipe connection - 4 times