


Drosselrückschlagventil

Unidirectional Flow Regulator
Regolatore di flusso unidirezionale in linea F.F.

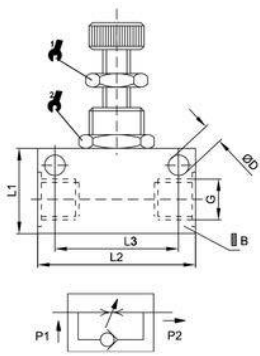

ITV	G	L1	L2	L3	ØD	B			NI/min*
304030	M5	15	25	18	4,5	12	11	12	40
304031	G1/8	22	35	24	4,5	15	13	12	243
304032	G1/4	30	40	24	4,5	20	15	12	300
304033	G3/8	30	50	35	6,5	25	22	22	600
304034	G1/2	40	65	50	6,5	30	26	26	600

* Ermittlung der Durchflusswerte bei 6 bar * Evaluation of flow rate at 6 bar
* portata nominale a 6 bar

Körper:	Aluminium
Body:	Aluminium
Corpo:	Alluminio
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +80 °C
Working temperature:	-20 °C bis +80 °C
Temperatura di esercizio:	da -20 °C a +80 °C
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	