



Soft start valve G1/4

Futura Serie

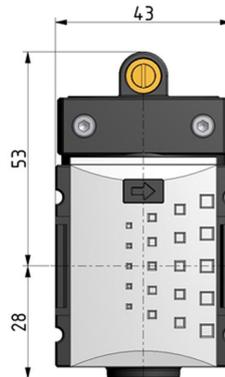


Article type	Article number	Series	Flow	Weight (kg)
KSSV-014	034979	Futura	2000 l/min	0,1362


Flow diagram



Symbol



Filling characteristics

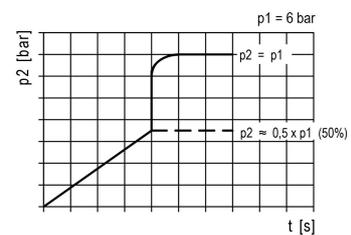

Technical data

Connection:
G 1/4

Construction size:
BG0

Flow:
2000 l/min

Input pressure P1 max.:
12 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +50 °C

System extensions:
poppet valve, actuated by secondary pressure

Switching pressure:
50% P1 (only for closed systems)



035762

Coupling kit BG0 FUTURA

035763

FUTURA coupling kit BG0 for wall assembly



040319

Coupling kit BG0 G1/4 for wall assembly




040327

Coupling kit BG0 G1/8 for wall assembly



040566

Coupling adapter BG0/BG1




052203

Mounting bracket FUTURA BG0 (BW.0+2x screw 3x10 with Torx 10IP)


Soft start valve G1/4

Futura Serie

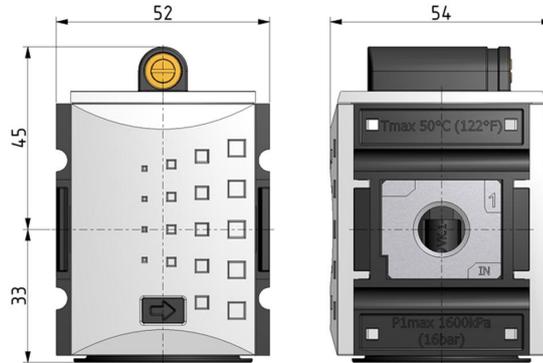


Article type	Article number	Series	Flow	Weight (kg)
KSSV-114	029965	Futura	2000 l/min	0,2357


Flow diagram



Symbol



Filling characteristics

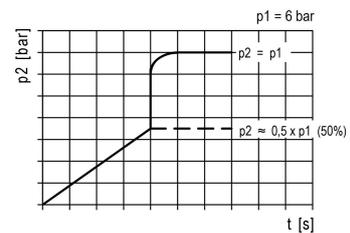

Technical data

Connection:
G 1/4

Construction size:
BG1

Flow:
2000 l/min

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +50 °C

System extensions:
poppet valve, actuated by secondary pressure

Switching pressure:
50% P1 (only for closed systems)



034270

FUTURA coupling kit BG1 for wall assembly



034271

Coupling kit BG1 FUTURA



040320

Coupling kit BG1 G1/4 for wall assembly



040324

Coupling kit BG1 G3/8 for wall assembly



040378

Coupling adapter BG1/BG2




052210

Mounting bracket FUTURA BG1 (BW.1+2x screw 3x10 with Torx 10IP)


Soft start valve G1/2

Futura Serie

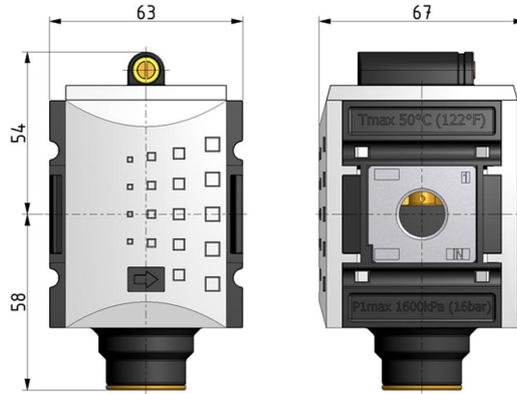


Article type	Article number	Series	Flow	Weight (kg)
KSSV-212	030886	Futura	4500 l/min	0,5261


Flow diagram



Symbol



Filling characteristics

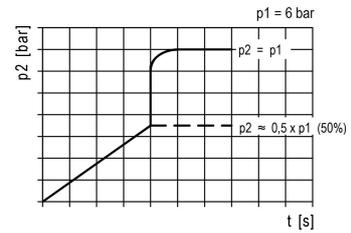

Technical data

Construction size:
BG2

Flow:
4500 l/min

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +50 °C

System extensions:
poppet valve, actuated by secondary pressure

Switching pressure:
50% P1 (only for closed systems)



034604

FUTURA coupling kit BG2 for wall assembly




052204

Mounting bracket FUTURA BG2 (BW.2+2x screw
3x10 with Torx 10IP)


Soft start valve G1

Futura Serie

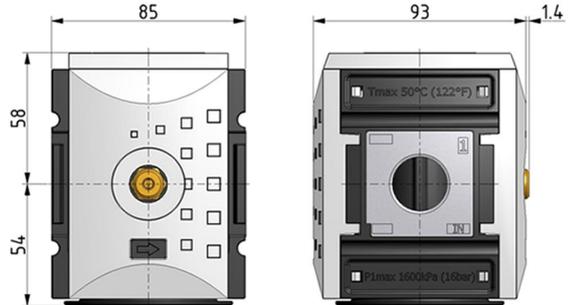


Article type	Article number	Series	Flow	Weight (kg)
KSSV-41	034417	Futura	10000 l/min	0,6239


Flow diagram



Symbol



Filling characteristics

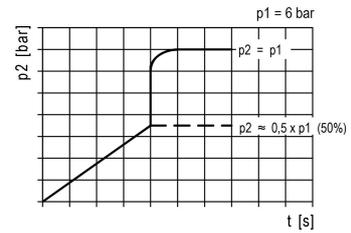

Technical data

Connection:
G 1

Construction size:
BG4

Flow:
10000 l/min


Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +50 °C


System extensions:
poppet valve, actuated by secondary pressure

Switching pressure:
50% P1 (only for closed systems)



034330

Mounting bracket FUTURA BG4 (BW.4+2x screw
3x10 with Torx 10IP)



034832

FUTURA coupling kit BG4 for wall assembly