


Rückschlagventil

pneumatisch entsperrbar

Check valve

Valvola di blocco unidirezionale

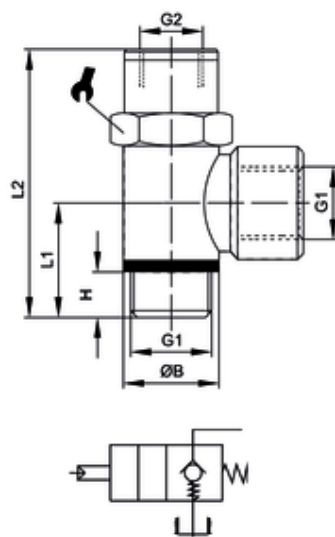

ITV	G1	ØB	G2	H	L1	L2	sw
304622	G1/8	14	M5	6	15,5	42	13


Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW 617N nichelato
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
Dichtungen:	Kunststoff
Seals:	Plastics
Rondella di tenuta sul filetto:	Tecnopolimero
Feder:	AISI 302
Spring:	AISI 302
Molla:	AISI 302
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +70 °C
Working temperature:	-20 °C up to +70 °C
Temperatura di esercizio:	da -20 °C a +70 °C
Betriebsdruck:	2 - 10 bar
Working pressure:	2 - 10 bar
Pressione di esercizio:	da 2 a 10 bar
Öffnungsdruck:	0,2 bar
Opening pressure:	0,2 bar
Pressione di apertura:	0,2 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	

Rückschlagventil

pneumatisch entsperrbar

Check valve

Valvola di blocco unidirezionale

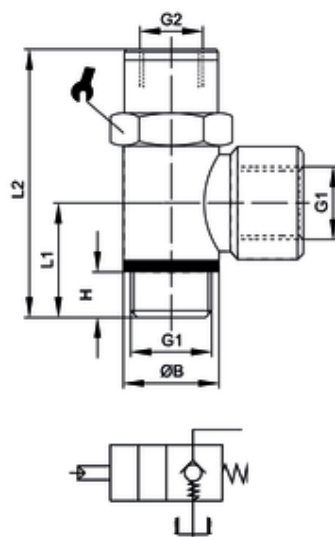

ITV	G1	ØB	G2	H	L1	L2	sw
304623	G1/4	18	M5	6	16,5	46,5	17


Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW 617N nichelato
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
Dichtungen:	Kunststoff
Seals:	Plastics
Rondella di tenuta sul filetto:	Tecnopolimero
Feder:	AISI 302
Spring:	AISI 302
Molla:	AISI 302
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +70 °C
Working temperature:	-20 °C up to +70 °C
Temperatura di esercizio:	da -20 °C a +70 °C
Betriebsdruck:	2 - 10 bar
Working pressure:	2 - 10 bar
Pressione di esercizio:	da 2 a 10 bar
Öffnungsdruck:	0,2 bar
Opening pressure:	0,2 bar
Pressione di apertura:	0,2 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	

Rückschlagventil

pneumatisch entsperrbar

Check valve

Valvola di blocco unidirezionale

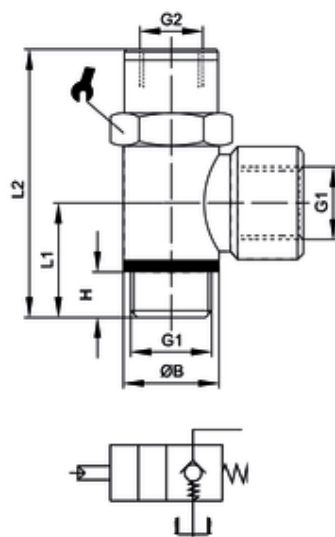

ITV	G1	ØB	G2	H	L1	L2	sw
304624	G3/8	22	G1/8	7,5	19	53,5	20


Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW 617N nichelato
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
Dichtungen:	Kunststoff
Seals:	Plastics
Rondella di tenuta sul filetto:	Tecnopolimero
Feder:	AISI 302
Spring:	AISI 302
Molla:	AISI 302
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +70 °C
Working temperature:	-20 °C up to +70 °C
Temperatura di esercizio:	da -20 °C a +70 °C
Betriebsdruck:	2 - 10 bar
Working pressure:	2 - 10 bar
Pressione di esercizio:	da 2 a 10 bar
Öffnungsdruck:	0,2 bar
Opening pressure:	0,2 bar
Pressione di apertura:	0,2 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	

Rückschlagventil

pneumatisch entsperrbar

Check valve

Valvola di blocco unidirezionale

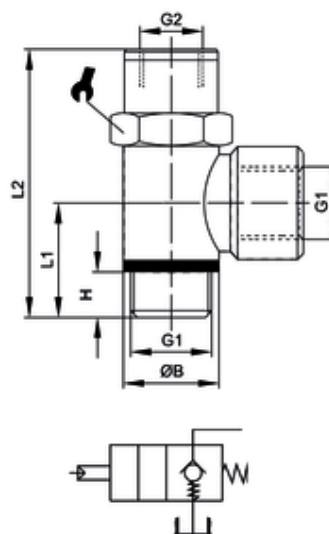

ITV	G1	ØB	G2	H	L1	L2	sw
304625	G1/2	26	G1/8	10	24,5	61,5	25

Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW 617N nichelato
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
Dichtungen:	Kunststoff
Seals:	Plastics
Rondella di tenuta sul filetto:	Tecnopolimero
Feder:	AISI 302
Spring:	AISI 302
Molla:	AISI 302
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +70 °C
Working temperature:	-20 °C up to +70 °C
Temperatura di esercizio:	da -20 °C a +70 °C
Betriebsdruck:	2 - 10 bar
Working pressure:	2 - 10 bar
Pressione di esercizio:	da 2 a 10 bar
Öffnungsdruck:	0,2 bar
Opening pressure:	0,2 bar
Pressione di apertura:	0,2 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	