



Filter G1/4 5µm with PC bowl and semi automatic drain

Multi-Fix Serie

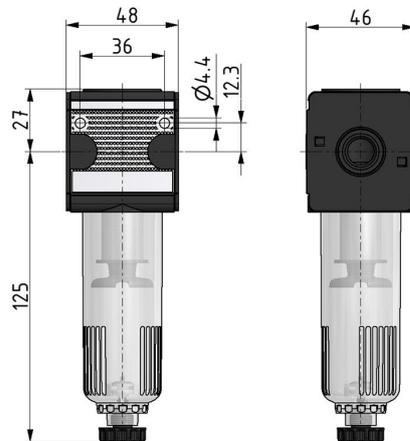


Article type	Article number	Series	Flow	Weight (kg)
F.11-5-PC-HA	003187	Multi-Fix	2000 l/min	0,2100

Flow diagram

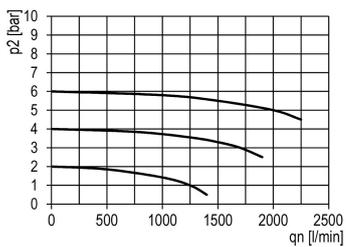

Symbol



Technical data

Filter:
Coarse filter

Connection:
G 1/4

Construction size:
BG1

Flow:
2000 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
5 µm


Condensate drain:
Semi-automatic drain (HA)

Accessories



005483

PC bowl with semi automatic drain and o-ring
30x2



052196

Mounting bracket (ZW.11+2x screw M4x50
DIN912)

Spare Parts

011228


Spare-part set: twist plate/baffle plate

052187

Spare-part set: filter element 5µm (Cellpor)


Filter G3/8 5µm with PC bowl and semi automatic drain

Multi-Fix Serie

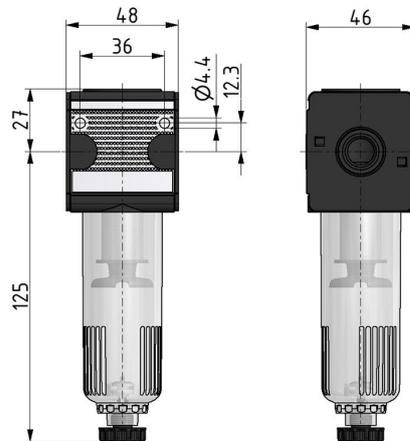


Article type	Article number	Series	Flow	Weight (kg)
F.12-5-PC-HA	004856	Multi-Fix	2000 l/min	0,2949

Flow diagram

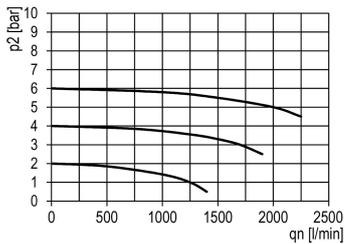

Symbol



Technical data

Filter:
Coarse filter

Connection:
G 3/8

Construction size:
BG1

Flow:
2000 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
5 µm


Condensate drain:
Semi-automatic drain (HA)

Accessories



005483

PC bowl with semi automatic drain and o-ring
30x2



052196

Mounting bracket (ZW.11+2x screw M4x50
DIN912)

Spare Parts

011228


Spare-part set: twist plate/baffle plate

052187

Spare-part set: filter element 5µm (Cellpor)


Filter G1/2 5µm with PC bowl and semi automatic drain

Multi-Fix Serie

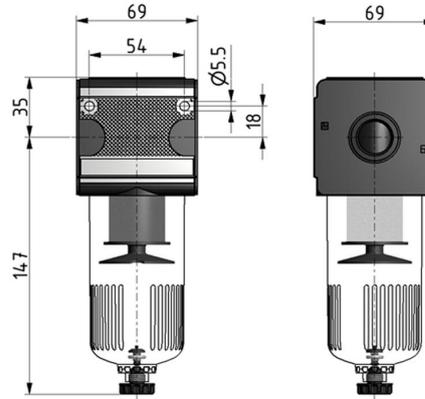


Article type	Article number	Series	Flow	Weight (kg)
F.33-5-PC-HA	003227	Multi-Fix	5000 l/min	0,7794

Flow diagram

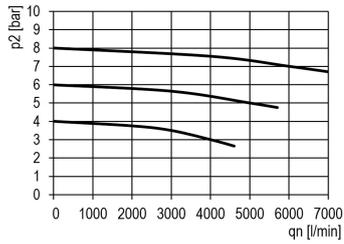

Symbol



Technical data

Filter:
Coarse filter

Connection:
G 1/2

Construction size:
BG3

Flow:
5000 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Input pressure P1 min.:
1,5 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
5 µm

Condensate drain:
Semi-automatic drain (HA)


Accessories



Kein Bild vorhanden

001370

PC bowl with semi automatic drain and o-ring
50x2



052201

Mounting bracket (ZW.33+2x screw M5x75
DIN912)


Spare Parts

052188

Spare-part set: filter element 5µm (Cellpor)


Filter G3/4 5µm with PC bowl and semi automatic drain

Multi-Fix Serie

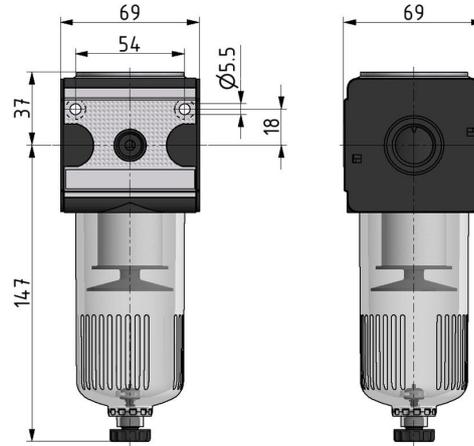


Article type	Article number	Series	Flow	Weight (kg)
F.34-5-PC-HA	004749	Multi-Fix	5850 l/min	0,6944

Flow diagram

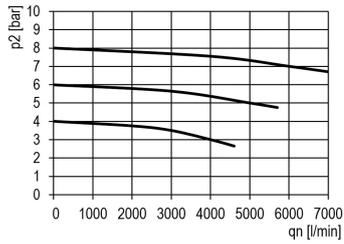

Symbol



Technical data

Filter:
Coarse filter

Connection:
G 3/4

Construction size:
BG3

Flow:
5850 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
5 µm

Condensate drain:
Semi-automatic drain (HA)


Accessories



Kein Bild vorhanden

001370

PC bowl with semi automatic drain and o-ring
50x2



052201

Mounting bracket (ZW.33+2x screw M5x75
DIN912)


Spare Parts

052188

Spare-part set: filter element 5µm (Cellpor)


Filter G1 40µm with PC bowl and semi automatic drain

Multi-Fix Serie

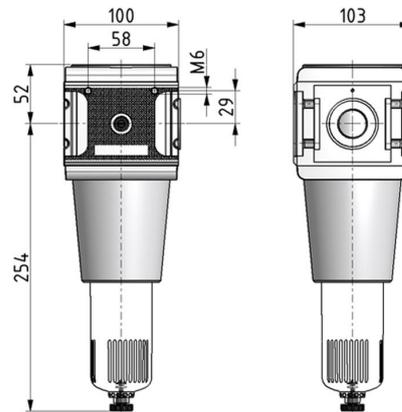


Article type	Article number	Series	Flow	Weight (kg)
F.55-40-PC-HA	007534	Multi-Fix	10500 l/min	1,8608

Flow diagram

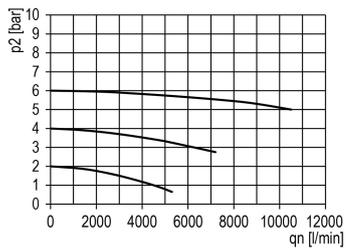

Symbol



Technical data

Filter:
Coarse filter

Connection:
G 1

Construction size:
BG5

Flow:
10500 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
40 µm

Condensate drain:
Semi-automatic drain (HA)


Accessories



Kein Bild vorhanden

001370

PC bowl with semi automatic drain and o-ring
50x2



009663

Mounting bracket (ZW.55+2x screw M6x12
DIN912)

Spare Parts

008866

spare-part set: filter element 40µm