




Filter regulator G1/4 0,5-10 5µm with PC bowl and semi automatic drain

Multi-Fix Serie

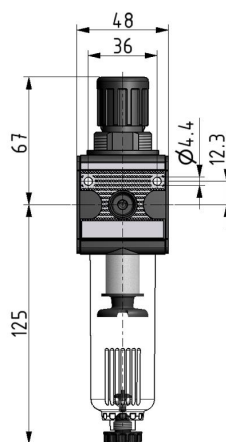


Article type	Article number	Series	Control range P2 max.	Flow	Weight (kg)
C.11-10-5-PC-HA	005454	Multi-Fix	10 bar	1600 l/min	0,3300


Flow diagram



Hysteresis



Symbol



Technical data

Connection:
G 1/4

Construction size:
BG1

Flow:
1600 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Control range P2 max.:
10 bar

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
5 µm

Condensate drain:
Semi-automatic drain (HA)

Air inlet:
Entry from left

Pressure gauge:
no


Panel nut:
no

Accessories




005483

PC bowl with semi automatic drain and o-ring
30x2



052193

Mounting bracket (ZW.11+2x screw M4x50
DIN912)



052196

Mounting bracket (ZW.11+2x screw M4x50
DIN912)



Kein Bild vorhanden

052269

Gauge ø50 0-16 G1/4 Knocks instrument dial
light grey

Spare Parts

001444

spring cage lockable

001457

spring cage lockable -VW Norm E11

006109

repair kit for regulator R.11, RB.11 and filter regulator C.11@@consistng of:1x Membran compl. (C.11), 1x Valve plug with lip seal (C.11), 1x O-ring 30x2 (DF.00-2)


052187

Spare-part set: filter element 5µm (Cellpor)




Filter regulator G3/8 0,5-10 5µm with PC bowl and semi automatic drain

Multi-Fix Serie

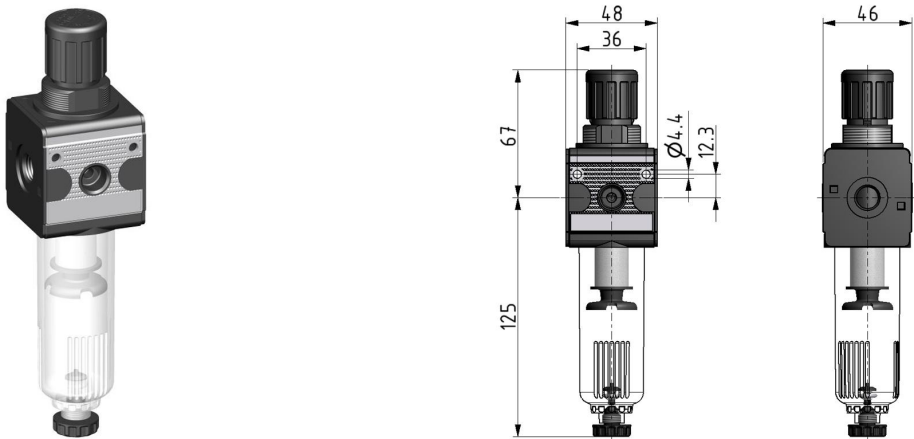


Article type	Article number	Series	Control range P2 max.	Flow	Weight (kg)
C.12-10-5-PC-HA	005080	Multi-Fix	10 bar	1600 l/min	0,3710


Flow diagram



Hysteresis



Symbol



Technical data


Connection: G 3/8	Construction size: BG1	Flow: 1600 l/min
Installation position: vertical	Input pressure P1 max.: 16 bar	Medium: Compressed air, neutral gases
Control range P2 max.: 10 bar	Temperature area: -10 °C - +60 °C	Container: PC
Filter fineness: 5 µm	Condensate drain: Semi-automatic drain (HA)	Air inlet: Entry from left
Pressure gauge: no	Panel nut: no	

Accessories




005483

PC bowl with semi automatic drain and o-ring
30x2



052193

Mounting bracket (ZW.11+2x screw M4x50
DIN912)



052196

Mounting bracket (ZW.11+2x screw M4x50
DIN912)



Kein Bild vorhanden

052269

Gauge ø50 0-16 G1/4 Knocks instrument dial
light grey

Spare Parts

001444

spring cage lockable

001457

spring cage lockable -VW Norm E11

006109



repair kit for regulator R.11, RB.11 and filter regulator C.11@@consistng of:1x Membran compl. (C.11), 1x Valve plug with lip seal (C.11), 1x O-ring 30x2 (DF.00-2)

052187

Spare-part set: filter element 5µm (Cellpor)


Filter regulator G1/2 0,5-10 5µm with PC bowl and semi automatic drain

Multi-Fix Serie

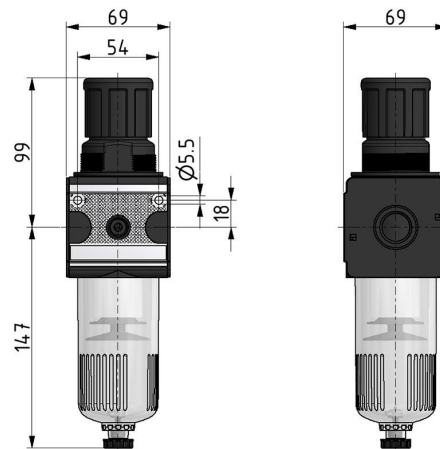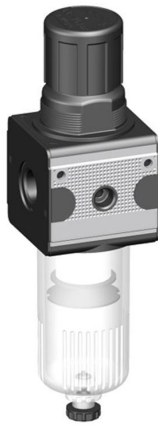


Article type	Article number	Series	Control range P2 max.	Flow	Weight (kg)
C.33-10-5-PC-HA	003163	Multi-Fix	10 bar	6700 l/min	0,8939


Flow diagram



Hysteresis



Symbol



Technical data

Connection:
G 1/2

Construction size:
BG3

Flow:
6700 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Control range P2 max.:
10 bar

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
5 µm

Condensate drain:
Semi-automatic drain (HA)

Air inlet:
Entry from left

Pressure gauge:
no

Panel nut:
no


Accessories



Kein Bild vorhanden


001370

PC bowl with semi automatic drain and o-ring
50x2



008803

Mounting bracket and panel mounting ring
M50x1.5 packed in a bag



052201

Mounting bracket (ZW.33+2x screw M5x75
DIN912)



Kein Bild vorhanden

052269

Gauge ø50 0-16 G1/4 Knocks instrument dial
light grey

Spare Parts

001465

Key lock bonnet

001469

spring cage lockable - VW Norm E11

006111

repair kit for regulator R.33, RB.33 and filter regulator C.33

018079



spring cage complete

052188

Spare-part set: filter element 5µm (Cellpor)


Filter regulator G3/4 0,5-10 5µm with PC bowl and semi automatic drain

Multi-Fix Serie

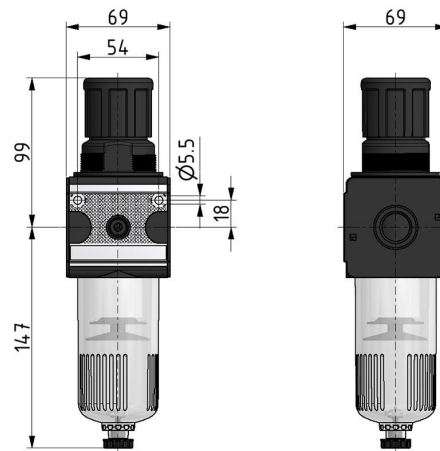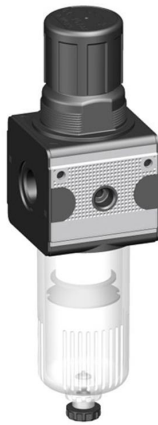


Article type	Article number	Series	Control range P2 max.	Flow	Weight (kg)
C.34-10-5-PC-HA	005084	Multi-Fix	10 bar	6700 l/min	0,8673


Flow diagram



Hysteresis



Symbol



Technical data

Connection:
G 3/4

Construction size:
BG3

Flow:
6700 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Control range P2 max.:
10 bar

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
5 µm

Condensate drain:
Semi-automatic drain (HA)

Air inlet:
Entry from left

Pressure gauge:
no

Panel nut:
no


Accessories



Kein Bild vorhanden


001370

PC bowl with semi automatic drain and o-ring
50x2



008803

Mounting bracket and panel mounting ring
M50x1.5 packed in a bag



052201

Mounting bracket (ZW.33+2x screw M5x75
DIN912)



Kein Bild vorhanden

052269

Gauge ø50 0-16 G1/4 Knocks instrument dial
light grey

Spare Parts

001465

Key lock bonnet

001469

spring cage lockable - VW Norm E11

006111

repair kit for regulator R.33, RB.33 and filter regulator C.33

018079




spring cage complete

052188

Spare-part set: filter element 5µm (Cellpor)


Filter regulator G3/4 0,5-10 40µm with PC bowl and semi automatic drain

Multi-Fix Serie

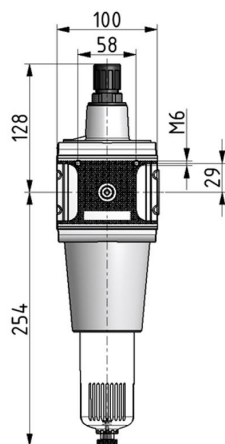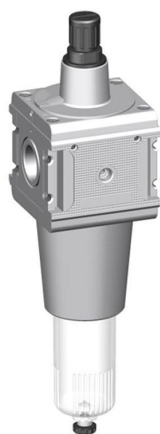


Article type	Article number	Series	Control range P2 max.	Flow	Weight (kg)
C.54-10-40-PC-HA	012088	Multi-Fix	10 bar	15000 l/min	2,2307


Flow diagram



Hysteresis



Symbol



Technical data

Connection:
G 3/4

Construction size:
BG5

Flow:
15000 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Control range P2 max.:
10 bar

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
40 µm

Condensate drain:
Semi-automatic drain (HA)

Air inlet:
Entry from left

Pressure gauge:
no

Panel nut:
no


Accessories



Kein Bild vorhanden


001370

PC bowl with semi automatic drain and o-ring
50x2



009663

Mounting bracket (ZW.55+2x screw M6x12
DIN912)



052355

ø63 gauge G1/4 0-16 instrument dial light grey

Spare Parts

029592




service kit: spring cage

047562

spare-part set: filter element 5µm


Filter regulator G1 0,5-10 8µm with PC bowl and semi automatic drain

Multi-Fix Serie

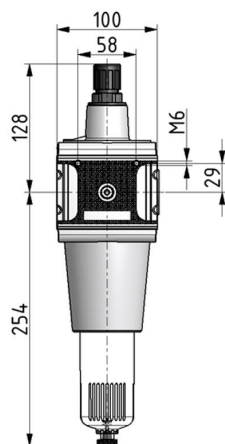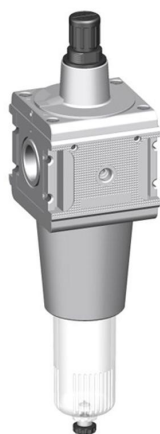


Article type	Article number	Series	Control range P2 max.	Flow	Weight (kg)
C.55-10-5-PC-HA	007587	Multi-Fix	10 bar	15000 l/min	2,2092


Flow diagram



Hysteresis



Symbol



Technical data

Connection:
G 1

Construction size:
BG5

Flow:
15000 l/min

Installation position:
vertical

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases

Control range P2 max.:
10 bar

Temperature area:
-10 °C - +60 °C

Container:
PC

Filter fineness:
5 µm

Condensate drain:
Semi-automatic drain (HA)

Air inlet:
Entry from left

Pressure gauge:
no

Panel nut:
no


Accessories



Kein Bild vorhanden


001370

PC bowl with semi automatic drain and o-ring
50x2



009663

Mounting bracket (ZW.55+2x screw M6x12
DIN912)



052355

ø63 gauge G1/4 0-16 instrument dial light grey

Spare Parts

029592

service kit: spring cage

047562

spare-part set: filter element 5µm