



Soft start valve G1/4 with adjustable throttle (switching point 50%)

Multi-Fix Serie

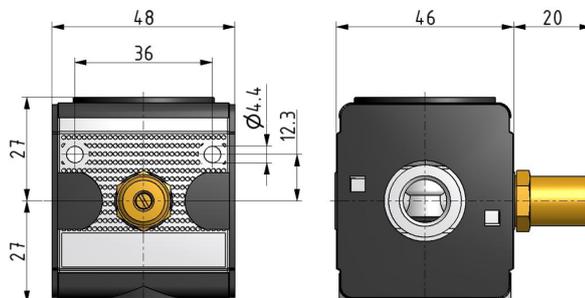


Article type	Article number	Series	Flow	Weight (kg)
A.11-F	007992	Multi-Fix	1100 l/min	0,3299


Flow diagram

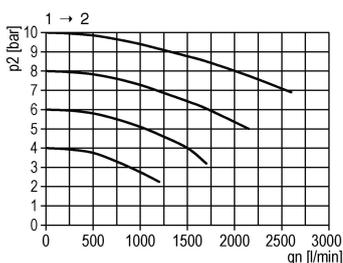


Symbol



Filling characteristics

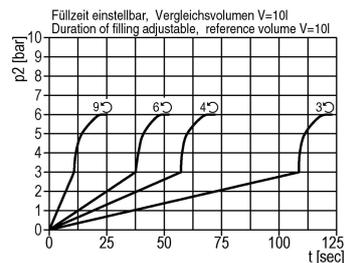

Example of use

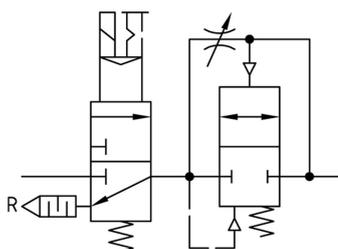

Technical data

Connection:
G 1/4

Construction size:
BG1

Flow:
1100 l/min

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases


Temperature area:
-10 °C - +60 °C

System extensions:
poppet valve, actuated by secondary pressure

Switching pressure:
50% P1 (only for closed systems)


Soft start valve G1/2 with adjustable throttle

Multi-Fix Serie

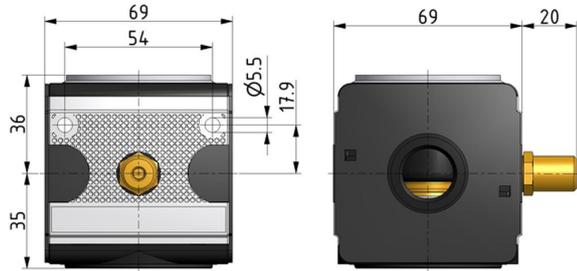


Article type	Article number	Series	Flow	Weight (kg)
A.33-F	008881	Multi-Fix	3500 l/min	0,7137


Flow diagram

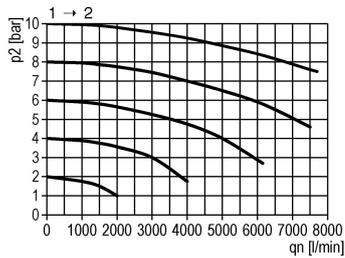


Symbol



Filling characteristics

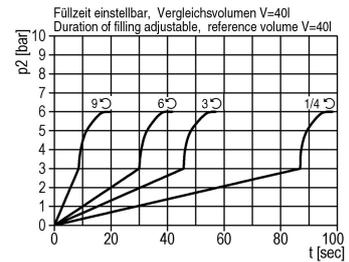

Example of use

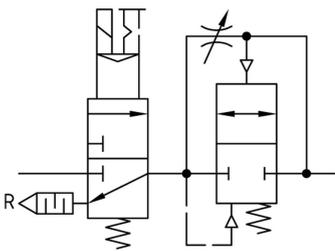

Technical data

Connection:
G 1/2

Construction size:
BG3

Flow:
3500 l/min

Input pressure P1 max.:
16 bar

Medium:
Compressed air, neutral gases


Temperature area:
-10 °C - +60 °C

System extensions:
poppet valve, actuated by secondary pressure

Switching pressure:
50% P1 (only for closed systems)


Soft start valve G3/4 with adjustable throttle

Multi-Fix Serie

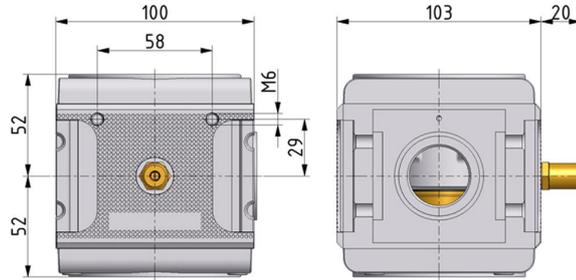


Article type	Article number	Series	Flow	Weight (kg)
A.54-F	011797	Multi-Fix	16000 l/min	0,9387


Flow diagram

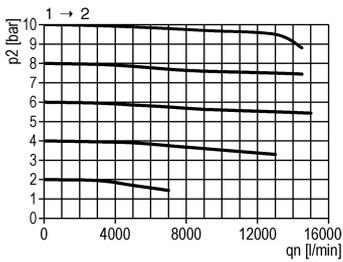


Symbol



Filling characteristics

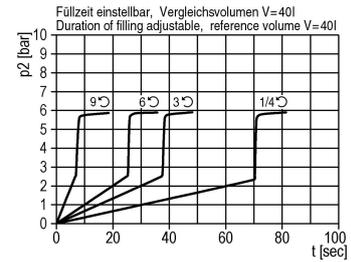

Example of use

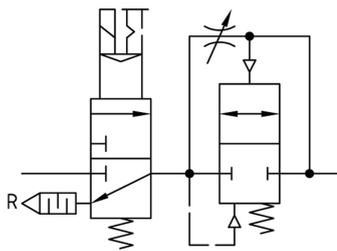

Technical data

Material Gehäuse:
Die-cast aluminium

Material Dichtungen:
NBR

Connection:
G 3/4

Construction size:
BG5

Flow:
16000 l/min

Input pressure P1 max.:
16 bar

Input pressure P1 min.:
2,0 bar

Medium:
Compressed air, neutral gases


Temperature area:
-10 °C - +60 °C

System extensions:
poppet valve, actuated by secondary pressure

Switching pressure:
50% P1 (only for closed systems)


Soft start valve G1 with adjustable throttle

Multi-Fix Serie

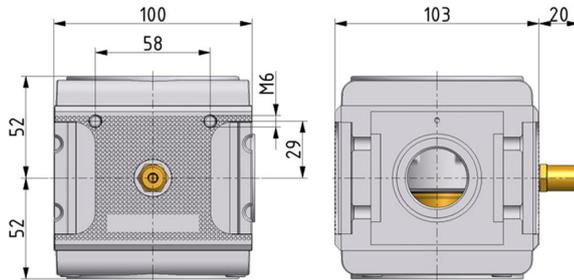


Article type	Article number	Series	Flow	Weight (kg)
A.55-F	007672	Multi-Fix	16000 l/min	1,5839


Flow diagram

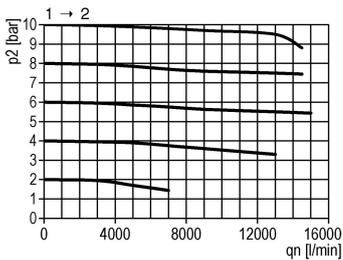


Symbol



Filling characteristics

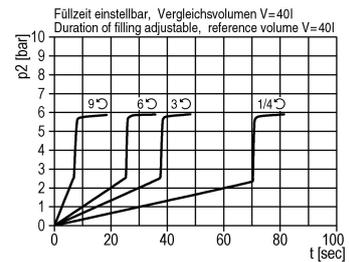

Example of use

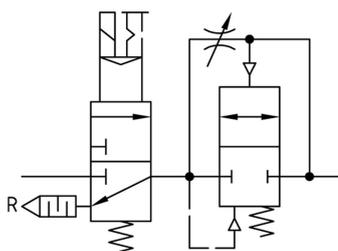

Technical data

Material Gehäuse:
Die-cast aluminium

Material Dichtungen:
NBR

Connection:
G 1

Construction size:
BG5

Flow:
16000 l/min

Installation position:
Arbitrary

Input pressure P1 max.:
16 bar

Input pressure P1 min.:
2,0 bar

Medium:
Compressed air, neutral gases

Temperature area:
-10 °C - +60 °C

System extensions:
poppet valve, actuated by secondary pressure

Switching pressure:
50% P1 (only for closed systems)