

Needle Valve

NV


with parallel BSP thread to ISO 228

back sealing on stem or stem seal below actuating threads (ASP)

also available with NPT inside thread

sf

332 G

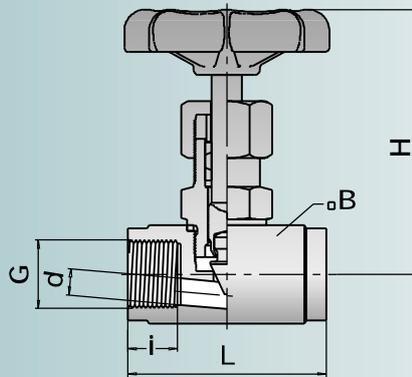

PN	G	i	□B	d	H	L	<i>sf</i> -No.	<i>sf</i> -No. (ASP)
250	G 1/8"	8,5	*	4	60	43	332 G 18	
400	G 1/4"	11,0	25	5	74	50	332 G 14	332 ASP G 14
	G 3/8"	12,5	25	6	74	55	332 G 38	332 ASP G 38
	G 1/2"	14,5	30	8	82	60	332 G 12	332 ASP G 12
	G 3/4"	16,5	35	10	82	75	332 G 34	332 ASP G 34
500	G 1"	20,0	50	14	115	100	332 G 1	332 ASP G 1
	G 1 1/4"	21,0	60	16	125	110	332 G 114	332 ASP G 114
	G 1 1/2"	22,0	60	19	125	130	332 G 112	332 ASP G 112
200	G 1 1/2"	22,0	60	19	125	130	332 G 112	332 ASP G 112
	G 2"	27,0	70	22	135	150	332 G 2	332 ASP G 2

■ * Forged

Housing Material: AISI 316Ti

Spindle Material: AISI 316Ti

Spindle Seal: Teflon

Hand Wheel: Pressed

also available with NPT inside thread

Temperature Range: -60°C to 200°C,
at 200°C a pressure reduction of 20% should be taken into account.