


SC

Schalldämpfer
Silencer
Silenziatore a tronco di cono

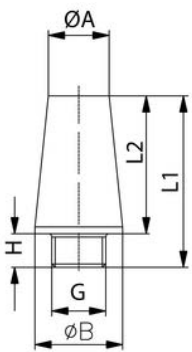

ITV	G	ØB	H	L1	L2	ØA
303018	M5	6	4,5	13	8,5	5
303012	G1/8	12	6	21	15	8
303013	G1/4	15	6	25	19	11
303014	G3/8	19	8	36	28	15
303015	G1/2	23	10	43	33	18
303016	G3/4	30	13	53	40	23
303017	G1	38	15	63	48	28
303019	G1/8 IG	12	6	23	15	8

Material:	Sinterbronze
material:	sintered bronze
Materiale:	Bronzo sferico sinterizzato
Filterfeinheit	50 µ
filter mesh:	50 µ
Elemento filtrante:	50 µ
Betriebsdruck:	max. 10 bar
working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Betriebstemperatur:	-10 °C bis +150 °C
working temperature:	-10 °C up to +150 °C
Temperatura di esercizio:	da -10 °C a +150 °C
zyl. Gewinde:	DIN EN ISO 228
cyl. threads:	DIN EN ISO 228
Filettatura	DIN EN ISO 228
metr. Gewinde:	DIN EN ISO 262
metr. threads:	DIN EN ISO 262
Filettatura metrica	DIN EN ISO 262