


ipso 040

Drosselrückschlagventil mit Steckverschraubung und Rändelkopf, Typ B, Abluft drosselbar

Flow regulator with push-in fittings and handwheel regulator type B

Regolatore di flusso manuale unidirezionale per cilindri tipo B

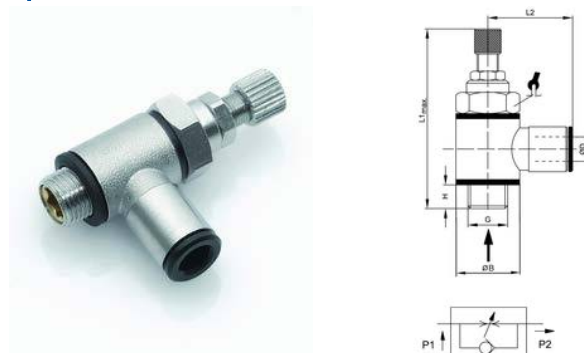

ITV	ØD	G	H	ØB	L1 max	L2		NI/min*
204001	4	G1/8	5	14	49	20,5	14	340
204002	6	G1/8	5	14	49	23	14	340
204004	6	G1/4	6	18	56,5	24	17	580
204003	8	G1/8	5	14	49	24,5	14	340
204005	8	G1/4	6	18	56,5	26	17	580
204008	8	G3/8	7,5	21	63,0	27,5	20	720
204006	10	G1/4	6	18	56,5	27	17	580
204011	10	G3/8	7,5	21	63,0	28,5	20	720
204007	12	G1/4	6	18	56,5	28	17	580

* Ermittlung der Durchflusswerte bei 6 bar * Evaluation of flow rate at 6 bar * portata nominale a 6 bar

Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW617N nichelato
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
Dichtungen:	Kunststoff
Seals:	Plastics
Rondella di tenuta sul filetto:	tecnopolimero
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +70 °C
Working temperature:	-20 °C up to +70 °C
Temperatura di esercizio:	da -20 °C a +70 °C
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	