


Adjustable Standpipe Elbow

ewv

pre installed



sf
564

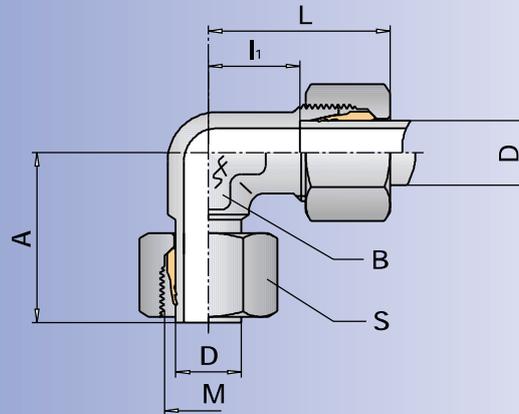

	PN	D	M	S	B	A	L	I ₁	sf-No.
L	315	6	M 12 x 1,5	14	12	26,0	27	12,0	564 6 L
		8	M 14 x 1,5	17	12	27,0	29	14,0	564 8 L
		10	M 16 x 1,5	19	14	28,5	30	15,0	564 10 L
		12	M 18 x 1,5	22	17	29,5	32	17,0	564 12 L
		15	M 22 x 1,5	27	19	32,5	36	21,0	564 15 L
		18	M 26 x 1,5	32	24	35,5	40	23,5	564 18 L
160		22	M 30 x 2,0	36	27	38,5	44	27,5	564 22 L
		28	M 36 x 2,0	41	36	41,5	47	30,5	564 28 L
		35	M 45 x 2,0	50	41	51,0	56	34,5	564 35 L
S	630	42	M 52 x 2,0	60	50	63,0	63	40,0	564 42 L
		6	M 14 x 1,5	17	12	27,0	31	16,0	564 6 S
		8	M 16 x 1,5	19	14	27,5	32	17,0	564 8 S
		10	M 18 x 1,5	22	17	30,0	34	17,5	564 10 S
		12	M 20 x 1,5	24	17	31,0	38	21,5	564 12 S
		14	M 22 x 1,5	27	19	35,0	40	22,0	564 14 S
400		16	M 24 x 1,5	30	24	36,5	43	24,5	564 16 S
		20	M 30 x 2,0	36	27	44,5	48	26,5	564 20 S
		25	M 36 x 2,0	46	36	50,0	54	30,0	564 25 S
315		30	M 42 x 2,0	50	41	55,0	62	35,5	564 30 S
		38	M 52 x 2,0	60	50	63,0	72	41,0	564 38 S

■ Material: AISI 316Ti

With higher pressure surges and vibrations, we recommend the use of our Cone Sealing Elbow sf 264.